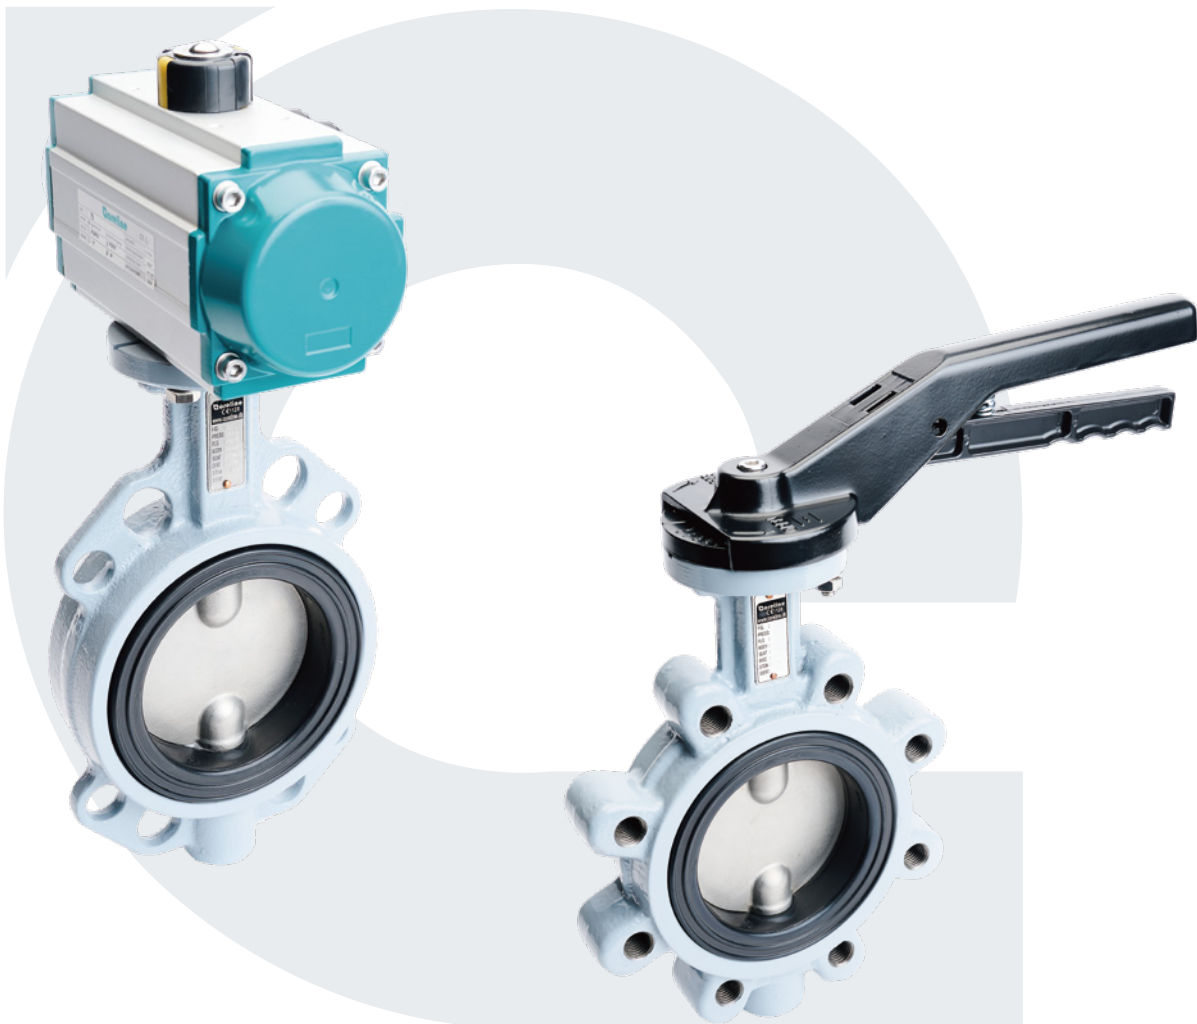


Rubber seat butterfly valves








Fig.223 : Wafer

Fig.224 : Lug



www.coreline.dk



page 3	General description and specification
page 4+5	Design features and chart for medium resistance
page 6	Seat options and specifications
page 7	Parts list and material specification
page 8	Fig. 223 Dimensions
page 9	Fig. 224 Dimensions
page 10	Valve torques
page 11	Flow capacities and valve sizing
page 12	Hand lever dimensions
page 13	Gear box dimensions
page 14	Fig.540/541 pneumatic actuator sizing - 6bar air supply
page 15	Fig.544 scotch yoke pneumatic actuator sizing - 6bar air supply
page 16	Fig.545 scotch yoke pneumatic actuator sizing - 6bar air supply
page 17	Fig.555/556 electrical actuator sizing
page 18	Bolt quantity and length for valve installation
page 19	Mating flange dimensions
page 20	Installation Guide

General description and specifications

General description

Butterfly valves are suitable for on/off and regulation for many different medias in pipelines.

The advantages are short face to face dimension, low weight, low torque and cheap price compare to many other valve types.

Please notice that rubber have limitations for media and temperature. Check table.

The disc for open/close is in center of valve. There may be situation where this is not applicable.




Specification

Nominal diameter:	DN25-DN2000
Standard differential pressure:	16 bar for DN25-DN200, 10 bar for DN250-DN2000
Max. differential pressure:	20 bar for DN25-DN600 16 bar for DN700-DN2000
Vacuum:	0.001 bar absolute (depending on medium and temperature)
Flange accommodation:	DN40-DN300: EN1092 PN10, PN16. ASME B16.5 Class150. JIS B 2239 10K, 16K. BS10 Table D, Table E DN350-DN2000: EN1092 PN10, PN16. ASME B16.5 Class150. BS10 Table D, Table E
Face to face:	EN558 Series 20; API 609 Table 1
Top flange:	EN ISO 5211
Temperature range:	-20°C to +150°C (depending on pressure, medium and material)
Tightness test:	ISO 5208 Rate A, API 598 Table 5 (medium: water)



Design features

Design features DN40-DN300

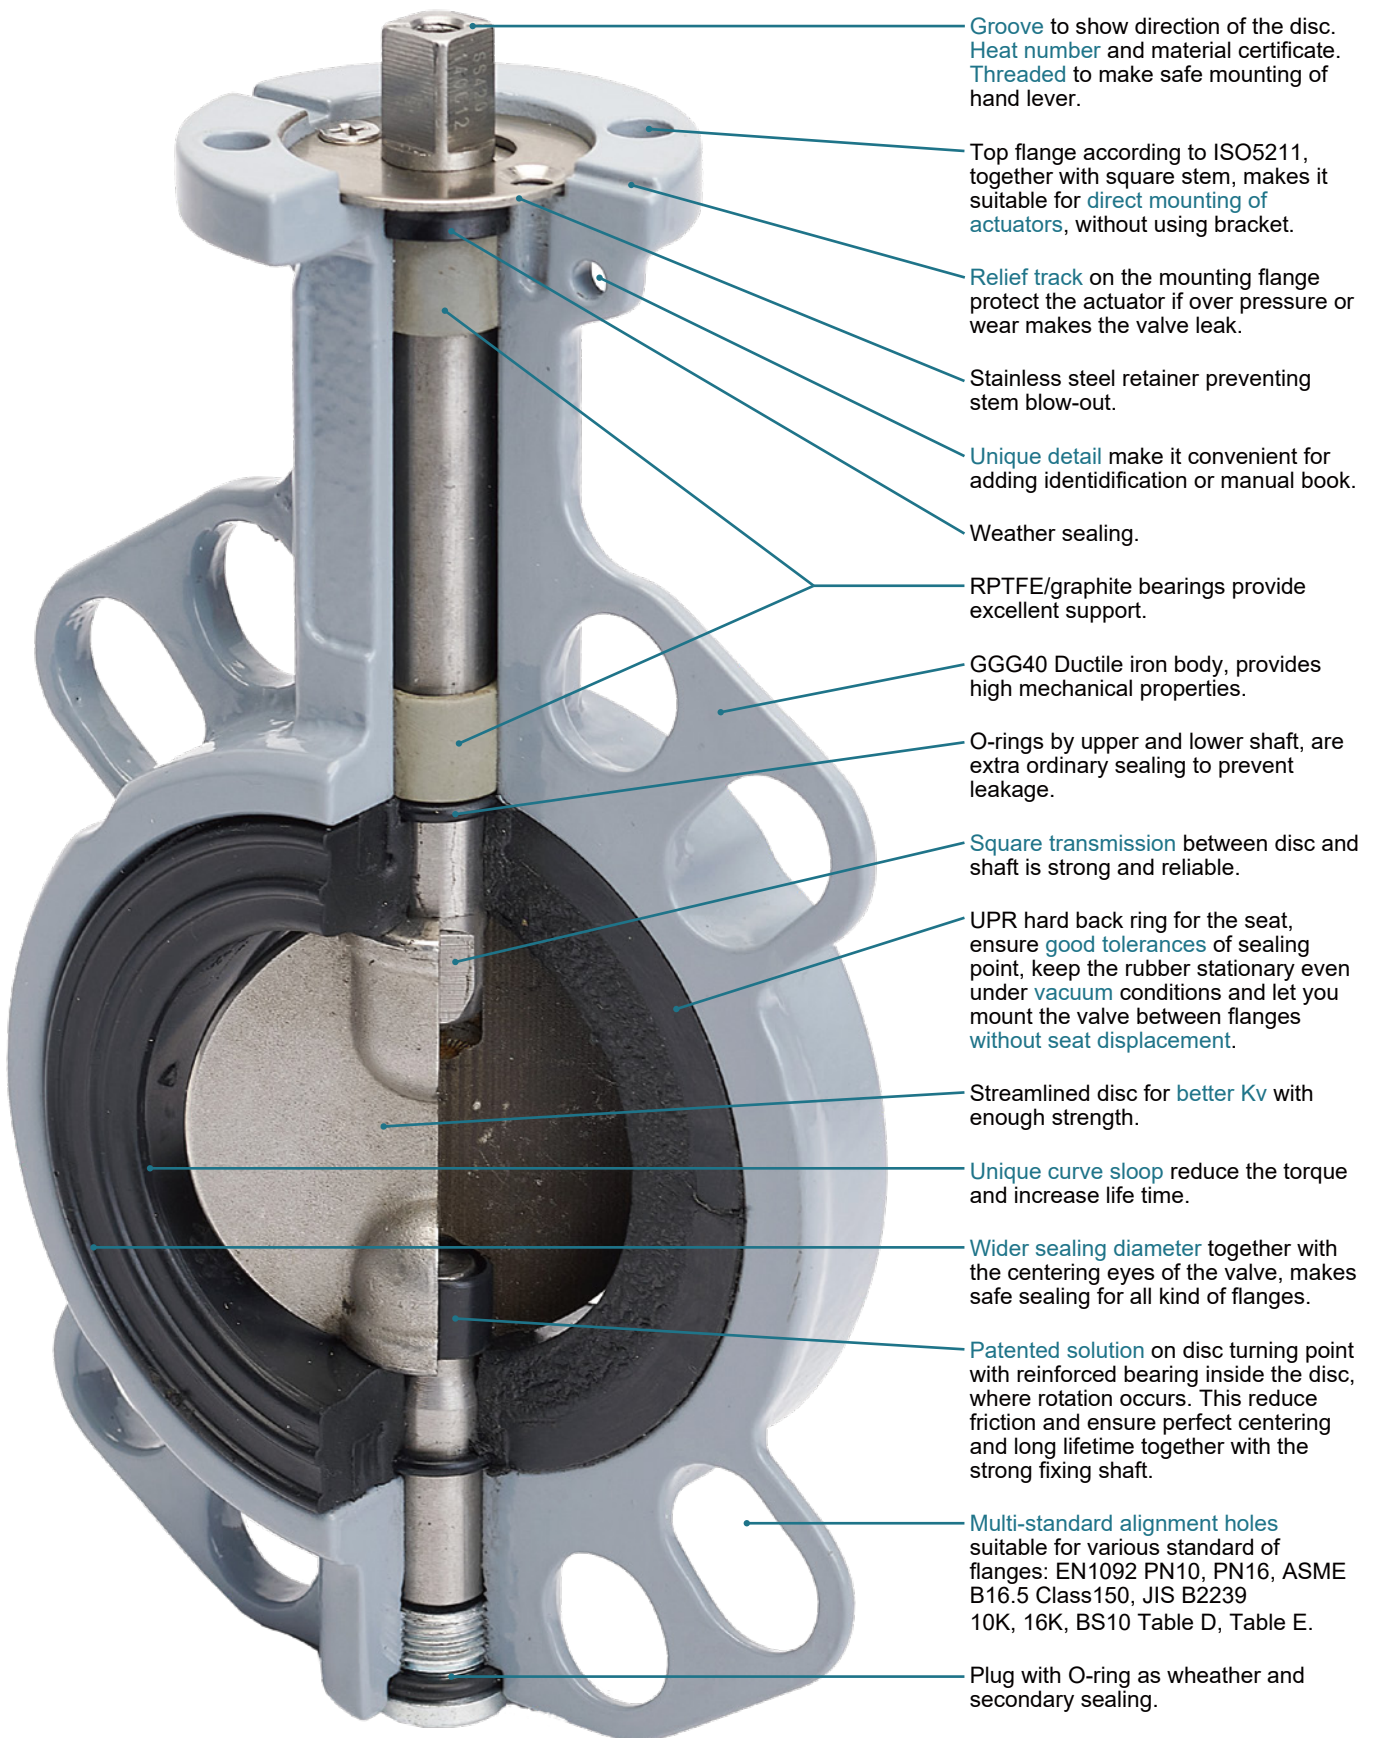


Design features



Advantages by bonding rubber to UPR hard back ring:

- Better tolerance;
- Suitable for vacuum application;
- Mounting between flanges without seat displacement.



Unique hole under mounting flange:

- Make it convenient to hang ion or tag identification.




Seat designed with curve slope:

- Flexibility reduces torque value, saving money for actuator.
- Achieve longer lifetime than traditional seats.



Strong square interface between disc and shaft ensure no operation stop.

Second sealing with replaceable O-ring on the back of the seat.



Retaining edge design on the LUG body/seat back ring:

This makes the LUG valve bear uni-directional full pressure when mounted against single flange at the end of pipeline.




Disc turning point with bearing inside give perfect tolerances, reduce torque ensure longer lifetime.

Plug is used on the bottom of the valve, preventing shaft to blow-out. O-ring by the plug offers a third sealing.



There is a groove inside back ring and together with curve slope, it brings a low torque between the disc and the seat by operating.




Groove on top flange will protect direct mounted actuator, if high pressure leakage happens.



Two-piece shaft design enhances low Kv and avoids turbulence, much better than one-piece shaft.

Disc sealing area is precisely machined and polished for torque and wears control.



Stainless steel blow-out safety arrangement, prevent accidents.

Below is U-ring as weather sealing.

Seat options and specifications


Applicable medium temperature range

SEAT MATERIAL	Safety temp. range	Lowest instantaneous temp.	Max. instantaneous temp.
EPDM-H	-20°C~+125°C	-40°C	+130°C
EPDM-H black FDA	-20°C~+125°C	-40°C	+130°C
EPDM white FDA	-20°C~+85°C	-30°C	+100°C
NBR (Eq. Nitrile)	-15°C~+85°C	-30°C	+100°C
NBR-DVGW (for gas)	-15°C~+60°C	-20°C	+70°C
X-NBR (wear resistant)	-15°C~+85°C	-30°C	+110°C
HNBR	-30°C~+150°C	-40°C	+170°C
Hi-NBR (for oil sludge)	-15°C~+100°C	-30°C	+110°C
FPM (Eq. FKM, Viton)	-15°C~+150°C	-20°C	+155°C
FEPM (for steam)	-15°C~+150°C	-20°C	+155°C
Natural rubber	-30°C~+80°C	-40°C	+100°C
Silicone rubber (no steam)	-20°C~+150°C	-30°C	+155°C
Silicone rubber (for steam)	-20°C~+120°C	-30°C	+150°C
PTFE	-15°C~+150°C	-20°C	+155°C

Chart for medium resistance

SEAT MATERIAL	SUITABLE FOR	UNSUITABLE FOR
EPDM	Water, steam, alcohol, glycol, caustic soda, ozone, food products, glycerine, milk, oxygen, air, saturated salt, iron chloride, gelatine, dry hydrogen sulphide, potassium chloride, sodium, magnesium chloride	Mineral oil, chlorine compound, ketone, acetyl, chloride, asphalt, bromine, butane, butyl, petrol, diesel oil, acid, fish oil, freon, chlorine, natural gas, exhaust gas, nitric acid
NBR	Mineral oil, grease, air, seawater, gas, boric acid, aluminium chloride, ammonia gas, citric acid, diesel oil, fish oil, petrol, gelatine, glycerine, magnesium chloride, lactic acid, linseed oil, natural gas	Ozone, acetone, aniline, chlorine dioxide, chromic acid, phenol, ethyl acetate, freon 21+22+23, hot nitric acid, styrene, hydrogen sulphide, isopropyl acetate, oxygen, sulphuric acid
Natural rubber	Abrasive medium, aluminium chloride, sugar beet fluid, boric acid, potassium chloride, citric acid, magnesium chloride, ferritic nitrate, formic acid, gelatine, sugar, glycerine, lactic acid, nitrogen	Steam, aniline, asphalt, butadiene, diesel oil, ethane, ethyl acetate, hydraulic oil, hydrochloric acid, linseed oil, methane, mineral oil, oxygen, styrene, soyabean oil, turpentine
Silicone	Food products, ammonia gas, barium, boric acid, potassium, bisulphite, citric acid, copper cyanide, glycerine, nitrogen, lactic acid	Steam and hot water (max. 100° C), asphalt, diesel oil, ethane, freon, ethyl chloride, methane, nitric acid, olive oil, propane, turpentine
FPM	Oil, mineral acid, grease, phosphorus, tannic acid, gelatine, glycol, oxygen, slaked lime, carbon acid, natural gas, pulp, salt, sugar, sulphur	Hot water, steam, ketone, ammonia gas, acetone, formaldehyde, cellulose acetate, freon, urea, ethanoic acid, methyl
FPM-B	Acid, alkali, amine hot water, steam	Gasoline, naphtha, hydrocarbon solvent, chlorine solvent
PTFE	Almost available for all medium applications	None

Parts list and material specification

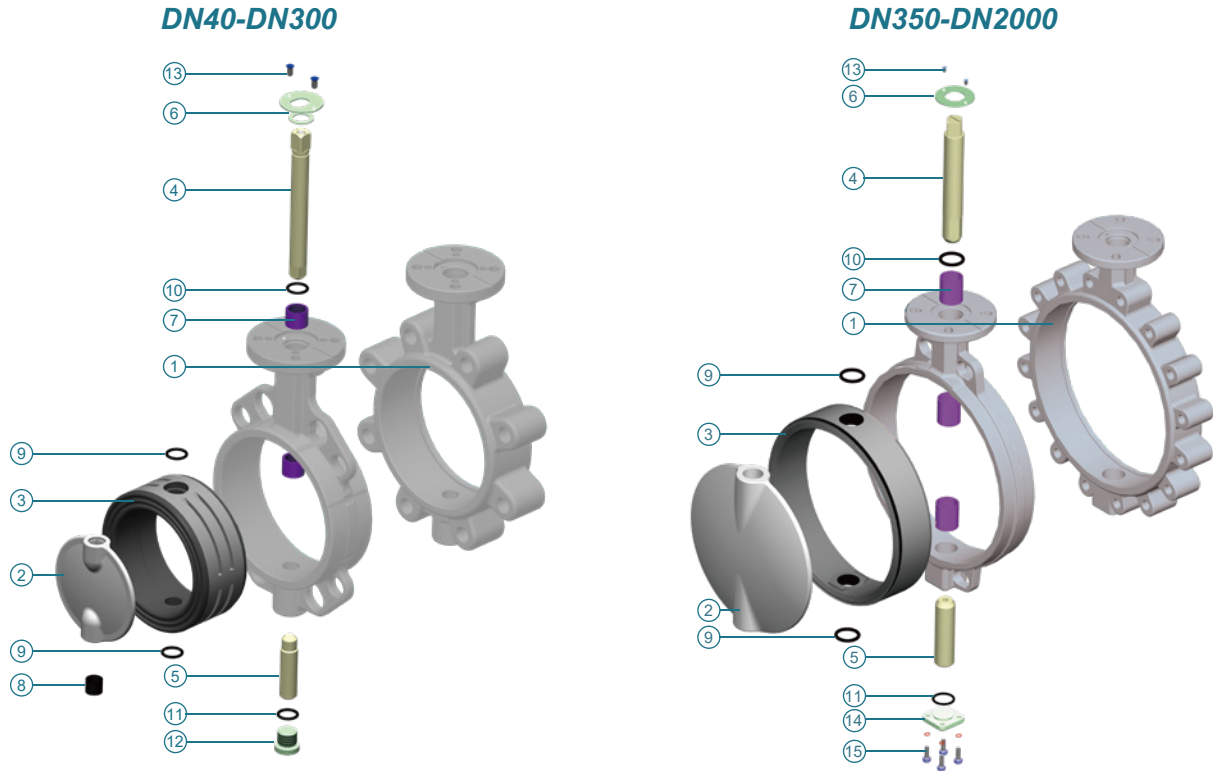

No.	Part name	Material	Specification	No.	Part name	Material		
1	Body	Ductile iron	EN1563 JS1030 (GGG40)	4/5	Stem	SS420 SS431 SS316 17-4PH SS		
2	Disc	Stainless steel	ASTM A351 CF8	6	Preventing plate	SS201		
			ASTM A351 CF8M			SS316		
			ASTM A351 CF3M		1.4469 (2507)	7	Body bearing	RPTFE with graphite
			Alloy steel		1.4462 (2205)		8	Disc bearing
		Aluminium bronze	C95800	9	O ring	Same as seat		
Ductile iron	Rilsan, Halar, Nylon coated	10	Weather seal	NBR				
3	Seat ¹⁾	EPDM-H	-20°C~+125°C	11	Anti-dust seal	NBR		
		EPDM-H FDA (Black)	-20°C~+125°C	12	Plug	Steel galvanized		
		EPDM FDA (White)	-20°C~+85°C	13	Screw	SS304 SS316		
		NBR (Eq. Nitrile)	-15°C~+85°C	14	Bottom cover	Same as body		
		NBR-DVGW (For gas)	-15°C~+60°C	15	Bolt	SS304		
		X-NBR (Wear resistant)	-15°C~+85°C			SS316		
		HNBR	-30°C~+150°C					
		Hi-NBR (For oil sludge)	-15°C~+100°C					
		FPM (Eq. FKM, Viton)	-15°C~+150°C					
		FEPM (For steam)	-15°C~+150°C					
		Natural rubber	-30°C~+80°C					
		Silicone rubber (No steam)	-20°C~+150°C					
		Silicone rubber (For steam)	-20°C~+120°C					
		PTFE ²⁾	-15°C~+150°C					


Notes:

1) Rubber seat with hard UPR backup; temperature ranges provided above are for safety application usage.

2) Depending on the backup rubber material, available with EPDM and FPM backup.

The above temperature range for the valve seats are provided as reference for general working conditions. Please note that the actual applications may vary due to the different media, pressure etc. in the pipeline. Contact Coreline in advance for technique supports.


Fig. 223 Dimensions

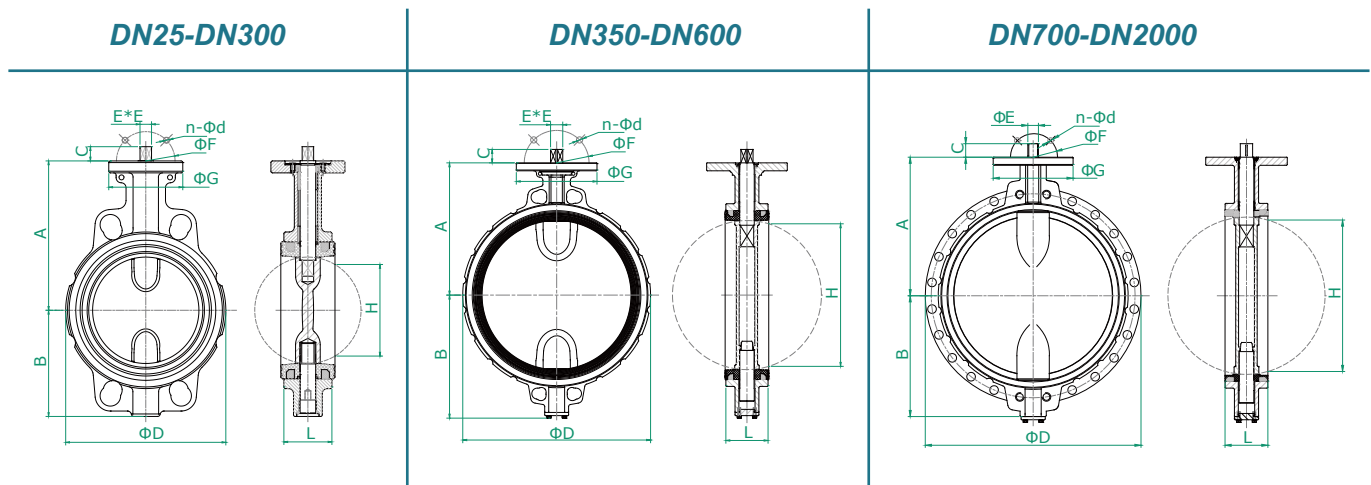

Size	A	B	C	D	E	F	n	d	G	H	Rubber sealing Dia.	L	[kg]
DN25/32	108	60	13.5	72	11	50	4	7	65	0	60	32	1.4
DN40	113	67.5	13.5	86	11	50	4	7	65	30	67.98	33	1.7
DN50	126	76	13.5	102	11	50	4	7	65	35	84.3	43	2
DN65	134	82	13.5	116	11	50	4	7	65	47	96.7	46	2.6
DN80	157	95.5	13.5	132	11	50	4	7	65	70	109.8	46	3.3
DN100	167	113.5	17.5	157	14	50+70	4	7+9	90	87	136.4	52	5
DN125	180	129	17.5	195	14	70	4	9	90	117	169.1	56	6.4
DN150	203	142	18.5	218	17	70	4	9	90	144	190.9	56	7.8
DN200	228	172	24.5	271	22	102	4	11	125	191	242	60	12.2
DN250	266	213	24.5	329	22	102	4	11	125	241	296.9	68	19
DN300	291	242	26.5	382	27	102+125	4+4	12+14	150	291	346.2	78	26
DN350	332	273	30	422	27	125+140	4+4	14+18	175	329	380.77	78	41
DN400	363	317	30	484	27	125+140	4+4	14+18	175	376	437.93	102	58
DN450	397	348	39	542	36	140+165	4+4	18+22	210	425	488.55	114	80
DN500	425	393	49	597	46	140+165	4+4	18+22	210	475	539.35	127	97
DN600	498	453	49	708	46	165+254	4+8	22+18	300	573	640.9	154	169
DN700	626	531	90	928	63.1	254	8	18	300	674	744.1	165	252
DN750	660	564	90	984	63.1	254	8	18	300	727	794.2	165	290
DN800	666	601	90	1061	63.1	254	8	18	300	771	849.4	190	367
DN900	722	660	110	1170	74.7	254	8	18	300	839	946.5	203	465
DN1000	806	728	120	1290	83.7	298	8	22	350	939	1052.55	216	606
DN1100	826	771	140	1404	94.7	298	8	22	350	1036	1162.25	255	805
DN1200	941	874	150	1511	104.7	298	8	22	350	1137	1263.65	276	900
DN1400	1000	940	175	1685	139.9	356	8	32	415	1351	-	279	1158
DN1600	1155	1085	195	1930	160	356	8	32	415	1548	-	318	1684
DN1800	1200	1170	195	2170	174.5	406	8	39	475	1703	-	356	2645
DN2000	1363	1360	245	2345	199	406	8	39	475	1938	-	406	4000

Different pressure may cause different dimension of "D".

Fig. 224 Dimensions

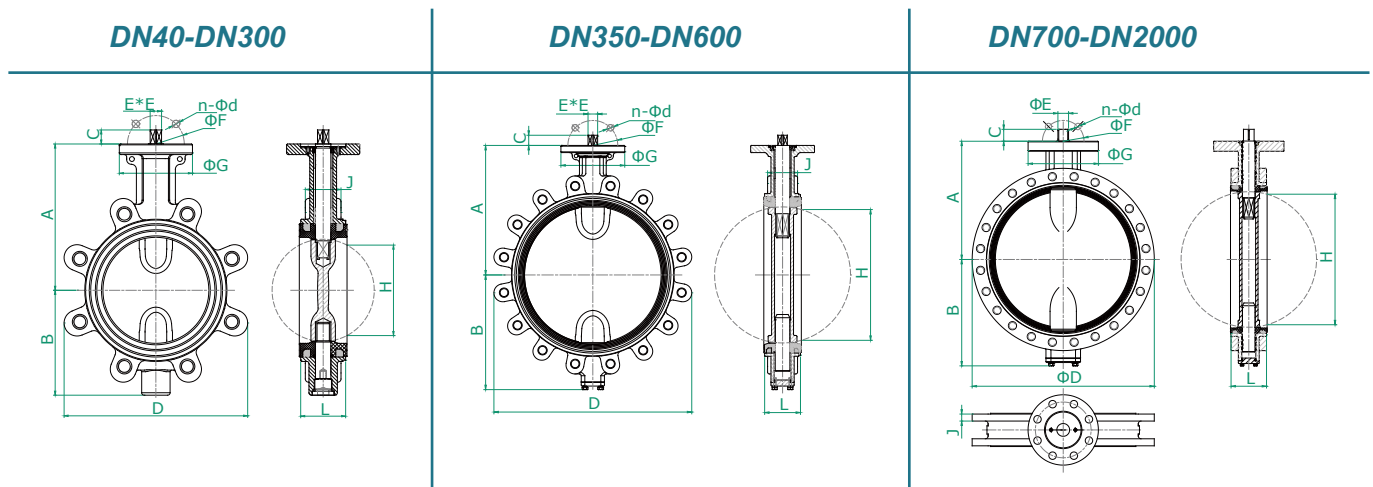

Size	A	B	C	D	E	F	n	d	G	H	Rubber sealing Dia.	L	[kg]
DN40	113	67.5	13.5	113	11	50	4	7	65	30	67.98	33	2.5
DN50	126	76	13.5	117	11	50	4	7	65	35	84.3	43	2.8
DN65	134	82	13.5	131	11	50	4	7	65	47	96.7	46	3.7
DN80	157	95.5	13.5	176	11	50	4	7	65	70	109.8	46	5.1
DN100	167	113.5	17.5	206	14	50+70	4	7+9	90	87	136.4	52	6.9
DN125	180	129	17.5	236	14	70	4	9	90	117	169.1	56	9.3
DN150	203	142	18.5	258	17	70	4	9	90	144	190.9	56	10.5
DN200	228	172	24.5	321	22	102	4	11	125	191	242	60	17.4
DN250	266	213	24.5	395	22	102	4	11	125	241	296.9	68	28.1
DN300	291	242	26.5	461	27	102+125	4+4	12+14	150	291	346.2	78	40
DN350	332	273	30	511	27	125+140	4+4	14+18	175	329	380.77	78	55
DN400	363	317	30	580	27	125+140	4+4	14+18	175	376	437.93	102	85
DN450	397	348	39	630	36	140+165	4+4	18+22	210	425	488.55	114	114
DN500	425	393	49	700	46	140+165	4+4	18+22	210	475	539.35	127	144
DN600	498	453	49	823	46	165+254	4+8	22+18	300	573	640.9	154	227
DN700	626	531	90	928	63.1	254	8	18	300	674	744.1	165	342
DN750	660	564	90	984	63.1	254	8	18	300	727	794.2	165	400
DN800	666	601	90	1061	63.1	254	8	18	300	771	849.4	190	485
DN900	722	660	110	1170	74.7	254	8	18	300	839	946.5	203	605
DN1000	806	728	120	1290	83.7	298	8	22	350	939	1052.55	216	776
DN1100	826	771	140	1404	94.7	298	8	22	350	1036	1162.25	255	985
DN1200	941	874	150	1511	104.7	298	8	22	350	1137	1263.65	276	1190
DN1400	1000	940	175	1685	139.9	356	8	32	415	1351	-	279	1380
DN1600	1155	1085	195	1930	160	356	8	32	415	1548	-	318	2054
DN1800	1200	1170	195	2170	174.5	406	8	39	475	1703	-	356	3075
DN2000	1363	1360	245	2345	199	406	8	39	475	1938	-	406	4500

Different pressure may cause different dimension of "D".

Valve torques (N*M)

Size	Standard disc differential pressure						Increased PN16 disc	Increased PN20 disc	Reduced PN6 disc
	EPDM/ NBR/ FPM seat				FDA seat	PTFE seat	EPDM/ NBR/ FPM seat		
	△P=3bar	△P=6bar	△P=10bar	△P=16bar	△P=16bar	△P=10bar	△P=16bar	△P=20bar	△P=6bar
DN40	9	9	10	11	15			15	7
DN50	10	10	11	12	20	13		16	8
DN65	15	16	17	18	30	20		25	10
DN80	23	24	25	26	40	30		40	15
DN100	35	36	37	38	60	50		60	22
DN125	45	48	52	57	90	60		80	35
DN150	90	95	100	105	150	125		150	55
DN200	185	190	195	200	300	245		256	91
DN250	260	270	280		450	350	380	450	170
DN300	300	320	340		550	400	400	510	230
DN350	500	550	600				720	870	400
DN400	620	700	800				870	1100	500
DN450	920	1000	1200				1600	2000	700
DN500	1600	1900	2200				3700	5700	950
DN600	2200	2500	2800				4900	7800	1600
DN700	3300	3600	3900				7300		2520
DN750	4400	4800	5300				8900		3400
DN800	6200	6700	7300				11000		4700
DN900	7100	7700	8300				13000		5400
DN1000	10000	11000	12000				24000		7700
DN1100	14000	15000	16000				32000		11000
DN1200	17000	19000	21000				42000		14000
DN1400	21000	23000	25000				50000		17000
DN1600	30000	32000	34000				70000		23000
DN1800	33000	36000	38000				80000		26000
DN2000	36000	38000	40000				90000		30000

* The torque above are not including safety factor. Add a safety factor 1.3 for sizing or consult the factory.

Service and medium factor - Actuator Sizing

Service factor [SF]	Multiply by	Medium factor [MF]	Multiply by	Medium factor [MF]	Multiply by
ON/OFF operation	1.15	Lubricating liquid/gas	0.90	For dry service (Dry gas/air)	1.25
Modulating operation	1.25	Viscous Liquids, Molasses	1.30	Dirty air slurry, natural gas, dirty slurry,	1.50-1.80
*) 2 cycle/day "NC"	1.15	Degreasing liquid	1.25	Lime water, chlorin gas,oxygen, powder	1.50-1.80
***) 1 cycle/week "NC"	1.50	Saturated steam	1.20	Hydrodynamic torque	NA

OBS: Butterfly valve torque is 100% by 0° to 6° angle and 33% from 7° to 90° angle.

* Valve is completely closed and opened 2 times a day minimum.

** Valve is completely closed and opened only one time per week or longer.

Having a long period without maneuvering the valve, will increase the breakaway torque.

EXAMPLE OF ACTUATOR SIZING: Simple ON/OFF operation, Medium: Molasses,

Valve: 223 DN100. 1.15[SF] x 1.30[MF] x 38[Nm] = 56.8Nm (Sizing torque actuator)

Only choose one Service factor [SF] and one Medium factor [MF] when calculating the sizing torque.

Flow capacities and valve sizing

Kv values-valve sizing Coefficients (M³/H at 1Bar ΔP)

DN	10°	20°	30°	40°	50°	60°	70°	80°	90°
40		1	3	7	14	26	38	47	52
50		2	6	13	29	47	70	97	105
65		3	11	26	49	77	121	170	212
80		6	28	54	91	140	213	301	390
100		19	38	79	140	232	412	590	676
125		27	84	156	248	385	624	945	1120
150	7	51	129	224	363	572	977	1490	1798
200	22	114	229	401	639	1018	1755	2680	3100
250	33	171	334	634	970	1530	2650	4105	5200
300	49	250	490	925	1416	2231	3865	6351	7350
350	118	301	631	1131	1918	3081	4963	8035	9993
400	153	393	824	1478	2506	4024	6482	10983	12595
450	195	498	1043	1871	3170	5093	8210	13695	16850
500	240	615	1288	2309	3913	6287	10128	17250	19306
600	345	885	1853	2958	5635	9054	14584	24980	28323
700	390	930	2210	3750	6959	11100	19200	33080	39700
750	450	1160	2400	4350	7890	12900	21200	36750	45350
800	520	1330	2650	5030	8890	14350	23750	39900	49530
900	600	1680	3350	6470	11890	19520	31700	52750	62000
1000	710	2210	4300	8100	15130	23720	40050	67000	81000
1100	990	3020	5980	10050	17580	28970	48950	83500	10580
1200	1278	4050	7650	12600	20100	34500	56750	99570	121000
1400	1470	5180	10100	18150	32000	51370	88900	142100	161000
1600	1730	7200	14530	26530	45400	71500	118700	198000	229000
1800	2020	8100	18750	34230	52130	90350	143780	243250	280000
2000	2320	9000	21320	40350	57980	110200	169870	278980	320000

Valve Sizing

Determining the size of butterfly valves for control purposes should not be done on the basis of the nominal diameter of the pipe but should be calculated on the basis of the operating characteristics in order to attain the correct control characteristics.

Butterfly valves Fig. 223 / Fig. 224 from Coreline valve are designed with approximately equal percentage characteristics over an opening angle of 65°.

You only need to consider the opening angle when determining the size of control valves. When determining the valve nominal diameter calculate the Kv value from the below formula:

Liquid:

$$K_v = Q \times \sqrt{\frac{W}{\Delta p}}$$

Gas:

$$K_v = \frac{V_N}{514} \sqrt{\frac{G \times T}{\Delta p \times p_d}}$$

Kv = Flow coefficient

Q = Max. flow volume in m³/h

w = Exact weight in kg/m³

Δp = Pressure drop in bar


V_N = Max. flow in Nm³/h

G = Exact weight in kg/Nm³

T = Absolute temp. in ° Kelvin

p_d = Absolute pressure downstream in bar


Example: DN 100

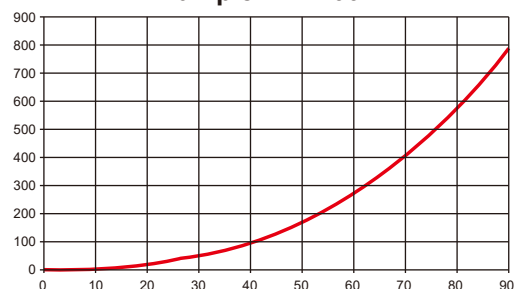

Hand lever dimensions

Fig.500 Aluminium hand lever

Excellent design and comfortable operating 90° in 10 positions. The lever is fixed by screw on top of stem to avoid the lever getting loose by operation or vibrations. For safety, the hand lever can be locked in position by bolt/nut or a locker. Material is AL-Si alloy, which has better performance than Al-Mg and Al-Zn alloy. Electroformed surface treatment, which has stronger adhesion than traditional painting and much better resistance to corrosion.

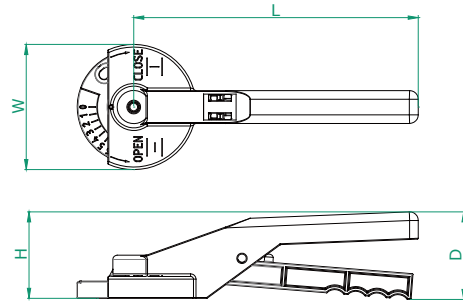

Size	D	H	L	W	Stem drive	[kg]
DN25-DN80	56	65	195	74	F05 - 11×11	0.28
DN100-DN125	78	82	269	101	F07 - 14×14	0.63
DN150	78	82	269	101	F07 - 17×17	0.63
DN200-DN250	101	100	330	145	F10 - 22×22	1.46


Fig.504 GGG40 and CF8M hand lever

GGG40 and CF8M hand lever have the same shape and share the same angle plate and locker.

GGG40 hand lever has strong electroformed surface treatment. CF8M hand lever is with precise casting which has very smooth surface.

Locker and plate in stainless steel SS316 and spring in SS321.

Good design and comfortable operating 90° in 10 positions, but also adjustable screw to choose any position for regulation. The lever is fixed by screw on top of stem and not by side of stem, to avoid the lever getting loose by operation or vibrations. For safety, the hand lever can be locked in position by bolt/nut or a locker.

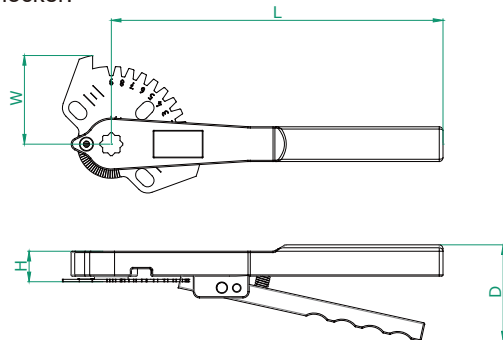

Size	D	H	L	W	Stem drive	[kg]
DN25-DN80	53	23	195	60	F05 - 11×11	0.8
DN100-DN125	77	30	267	73	F07 - 14×14	1.2
DN150	77	30	267	73	F07 - 17×17	1.2
DN200-DN250	75	30	330	99	F10 - 22X22	1.6

Gear box dimensions

Fig.520

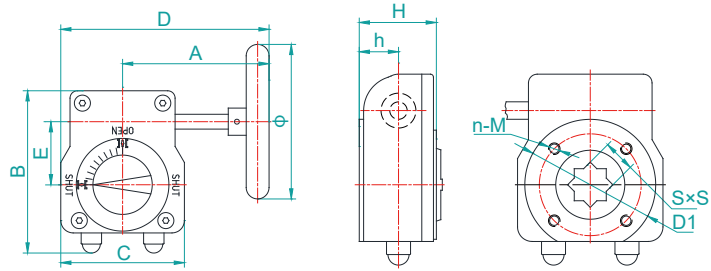


Fig.521

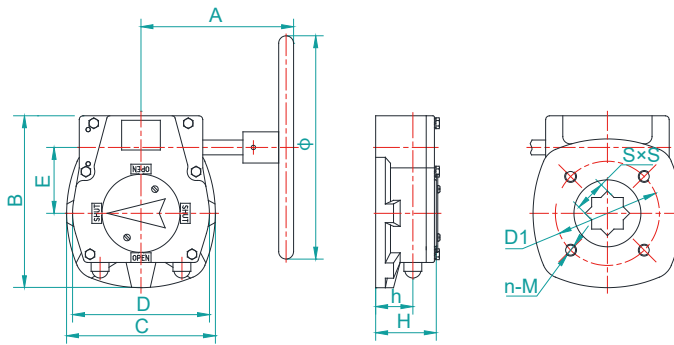


Fig.521



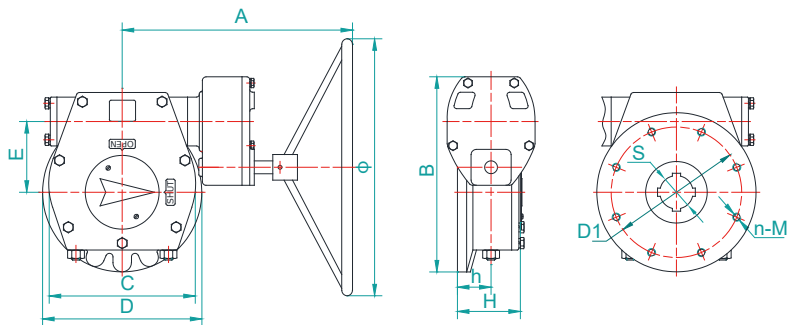


Fig.223/224 Size	Gear Box Model	Output [Nm]	Ratio	Input [Nm]	A	B	C	D	E	Φ	h	H	D1	n-M	S	[kg]	Material
DN25-DN80	520-10	150	40:1	18.5	99	98	80	139	42.5	100	26	48	50+70	4-M6/4-M8	11 x 11	1.45	Housing: Aluminium/ CF8M Input shaft: SS410/ SS304/SS316 Gear: Ductile iron Alu-Bronze
DN100-DN125 DN150	520-15	250	37:1	34	115	115	100	165	50	120	27	54	70	4-M8	14 x 14 17 x 17	1.9	
DN200-DN250 DN300	520-50	750	45:1	83	220	155	146	293	60	300	38	71	102	4-M10	22 x 22 27 x 27	5.2	Housing: Cast iron/ CF8/CF8M Worm shaft: SS410/ SS304/SS316 6 Gear: Ductile iron/ Alu-Bronze
DN350 DN400 DN450 DN500	521-M12 521-M14 521-M15	1000 1800 3400	42:1 60:1 68:1	90 110 165	210 277 357	182 231 296	138 184 248	165 200 252	66 89 123	300 300 400	42 50 50	72 81 91	140 140 165	4-M16 4-M16 4-M20	27 x 27 27 x 27 36 x 36 46 x 46	11 14 32	
DN600 DN700-DN750 DN800-DN900	521-M16 521-M36 521-M50S	4400 8000 11000	88:1 210:1 250:1	169 180 180	382 448 480	354 380 446	313 286 355	315 310 355	153 138 181	500 500 500	50 73 80	93 130 160	165+254 254 254	4-M20/8-M16 8-M16 8-M16	46 x 46 Φ _{max} 85 Φ _{max} 110	44 66 109	Housing: Cast iron/ CF8/CF8M Worm shaft: SS410/ SS304/SS316 6 Gear: Ductile iron/ Alu-Bronze
DN1000 DN1100 DN1200 DN1400 DN1800 DN1800	521-M50 521-M60 521-M65 521-M70	16000 24000 35000 50000	612:1 720:1 882:1 1242:1	190 220 230 200	555 616 648 686	440 528 572 657	355 463 558 610	355 415 415 475	181 237 282 309	600 700 700 700	80 82 84 107	160 165 172 225	298 298 298 406	8-M20 8-M20 8-M30 8-M36	Φ _{max} 110 Φ _{max} 160 Φ _{max} 160 Φ _{max} 160	122 188 255 310	
DN2000	521-M75	70000	1430:1	240	706	697	692	475	349	700	110	231	406	8-M36	Φ _{max} 180	440	

The sizing of gear box is calculated on standard working conditions for our butterfly valves.
The gear boxes can also be delivered to other kind of quarter turn valves.

Fig.540/541 pneumatic actuator sizing - 6bar air supply

Fig.540/541 Rack & pinion pneumatic actuators

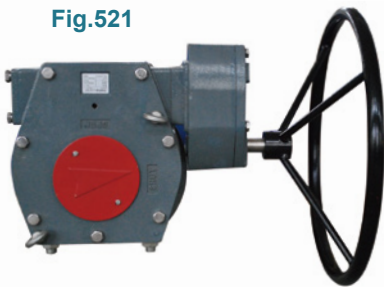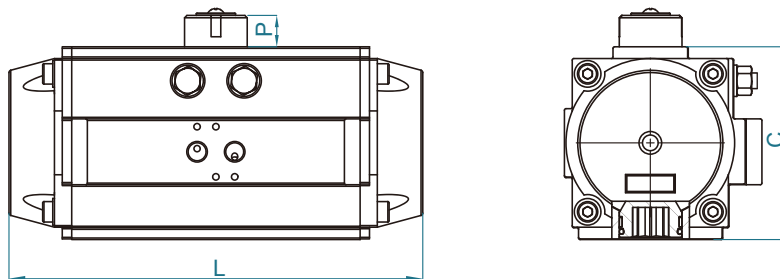

Sizing - Fig.540 Air/air (Double acting)

Fig.223/224		Sizing - Fig.540 Double acting							
Size	¹⁾ Torque /Nm	Size	Output torque /Nm	ISO5211	Stem	C /mm	P /mm	L /mm	[kg]
DN40	11	40	14.3	F03+F05	11×11	60	20	110	1
DN50	12	50	21.6	F03+F05	11×11	70	20	154	1.13
DN65	18	50	21.6	F03+F05	11×11	70	20	154	1.13
DN80	26	65	43.9	F03+F05	14×14	89	20	189	1.97
DN100	38	75	68.2	F05+F07	14×14	100	20	210	2.93
DN125	57	85	100.1	F05+F07	17×17	113	20	229	3.78
DN150	105	95	140.6	F05+F07	17×17	123	20	264	5.14
DN200	200	125	327.4	F07+F10	22×22	161	30	337	10.86
DN250	280	140	482.9	F10+F12	27×27	178	30	377	13.77
DN300	340	140	482.9	F10+F12	27×27	178	30	377	13.77
DN350	600	190	1053.9	F10+F14	27×27	232	30	488	28.41
DN400	800	190	1053.9	F10+F14	27×27	232	30	488	28.41
DN450	1200	210	1471.3	F14	36×36	255	30	550	40.03
DN500	2200	270	3207.5	F16	46×46	331	30	672	73.64


Sizing - Fig.541 Air/spring (Spring return)

Fig.224/224		Sizing - Fig.541 Spring return								
Size	¹⁾ Torque /Nm	Size	Torque air /Nm 0° - 90°	Torque spring /Nm 90° - 0°	ISO5211	Stem	C /mm	P /mm	L /mm	[kg]
DN40	11	65 S10	26.5 - 17.7	26.2 - 17.4	F03+F05	11×11	89	20	189	2.21
DN50	12	65 S10	26.5 - 17.7	26.2 - 17.4	F03+F05	11×11	89	20	189	2.21
DN65	18	75 S12	42.5 - 27.7	40.4 - 25.7	F05+F07	14×14	100	20	210	3.29
DN80	26	85 S12	60.3 - 37.5	62.5 - 39.7	F05+F07	14×14	113	20	229	4.26
DN100	38	95 S12	87.6 - 57.0	83.6 - 53	F05+F07	14×14	123	20	264	5.86
DN125	57	110 S12	114.6 - 73.2	110 - 68.6	F07+F10	14×14	136	20	266	7.17
DN150	105	125 S12	205 - 134	193.3 - 122.4	F07+F10	17×17	161	30	337	12.54
DN200	200	160 S12	406.4 - 281	389.4 - 264	F10+F12	22×22	200	30	412	23.75
DN250	280	190 S12	617.7 - 427.1	626.8 - 436.2	F10+F14	27×27	232	30	488	33.81
DN300	340	190 S12	617.7 - 427.1	626.8 - 436.2	F10+F14	27×27	232	30	488	33.81
DN350	600	240 S12	1296.9 - 952.5	1329.6 - 985.2	F14+F16	27×27	292	30	602	77.76
DN400	800	240 S12	1296.9 - 952.5	1329.6 - 985.2	F14+F16	27×27	292	30	602	77.76

1) Please consider a safe factor of 1.2~1.3 on the given torque values for the sizing; torque values given are for EPDM-H seats. The sizing of actuator to valve dimension are calculated on standard working conditions for Fig.223/224 butterfly valves. The actuators can also be delivered to other kind of quarter turn valves.

Fig.544 scotch yoke pneumatic actuator sizing - 6bar air supply

Fig.544 Scotch yoke pneumatic actuators

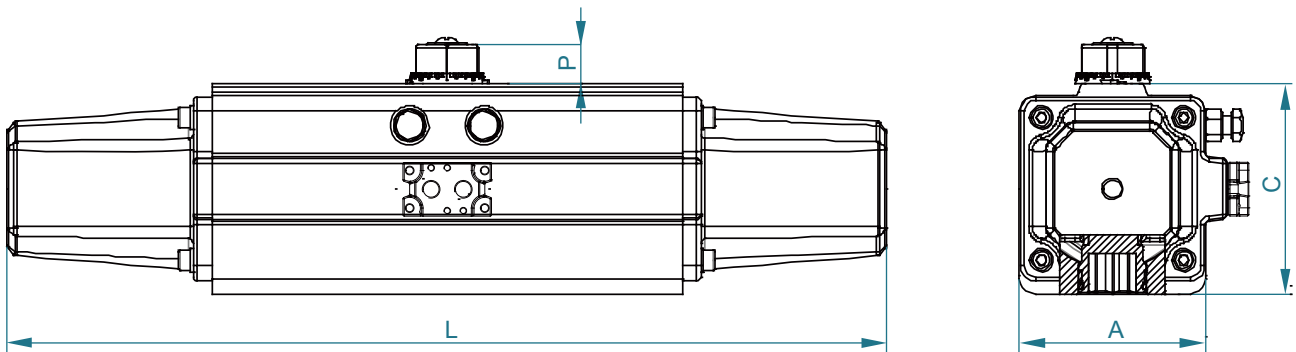

Sizing - Fig.544 Air/air (Double acting)

Fig.223/224		Sizing - Fig.544 Double acting				Fig.544 Double acting - Dimensions [mm]					
Size	1) Torque [Nm]	Model	Output torque [Nm] - Air supply 6bar			ISO5211	Stem drive	P	A	C	L [DA]
			0	45°	90°						
DN125	57	544100DA	121.8	60.9	121.8	F05+F07	14×14	20	78	89	228
DN150	105	544150DA	184.7	92.4	184.7	F05+F07	14×14	20	88	100	258
DN200	200	544250DA	283.6	141.8	283.6	F07+F10	17×17	20	100	113	301
DN250	280	544350DA	397.6	198.8	397.6	F07+F10	22×22	20	110	123	340
DN300	340	544450DA	529.9	265	529.9	F10+F12	22×22	20	120	136	366
DN350	600	544800DA	951.3	475.7	951.3	F10+F12	22×22	30	142	159	450
DN400	800	5441000DA	1287.5	643.75	1287.5	F14	36×36	30	160	178	483
DN450	1200	5441500DA	1853	926.5	1853	F14	36×36	30	180	200	563
DN500	2200	5443000DA	3675.6	1837.8	3675.6	F16	46×46	30	230	250	697

Sizing - Fig.544 Air/spring (Spring return)

Fig.223/224		Sizing - Fig.544 Spring return							Fig.544 Spring return - Dimensions [mm]					
Size	1) Torque [Nm]	Model	Air torque [Nm] - Air supply 6bar			Spring torque [Nm]			ISO5211	Stem drive	P	A	C	L [SR]
			0	45°	90°	0	45°	90°						
DN100	38	544100SR3	71.7	30.5	50.2	50.2	30.5	71.7	F05+F07	14×14	20	78	89	360
DN125	57	544150SR3	127.8	54.3	89.4	76.1	46.2	108.7	F05+F07	14×14	20	88	100	398
DN150	105	544350SR3	234	99.5	163.9	163.6	99.4	233.8	F07+F10	22×22	20	110	123	521
DN200	200	544800SR3	559.6	237.8	391.7	391.7	237.8	559.6	F10+F12	22×22	30	142	159	677
DN250	280	544800SR3	559.6	237.8	391.7	391.7	237.8	559.6	F10+F12	22×22	30	142	159	677
DN300	340	5441000SR3	757.4	321.9	530.2	530.2	321.9	757.4	F14, F12	36×36	30	160	178	769
DN350	600	5441500SR3	1090	463.3	763	763	463.3	1090	F14	36×36	30	180	200	880
DN400	800	5442000SR3	1482.9	635	1057.3	960	586.4	1385.6	F14	36×36	30	202	222	895
DN450	1200	5443000SR3	2162	918.8	1513.3	1513.5	918.9	2162.2	F16	46×46	30	230	250	1080

1) Please consider a safe factor of 1.2~1.3 on the given torque values for the sizing; torque values given are for EPDM-H seats. The sizing of actuator to valve dimension are calculated on standard working conditions for Fig.223/224 butterfly valves. The actuators can also be delivered to other kind of quarter turn valves.

Fig.545 scotch yoke pneumatic actuator sizing - 6bar air supply

Fig.545 Scotch yoke pneumatic actuators

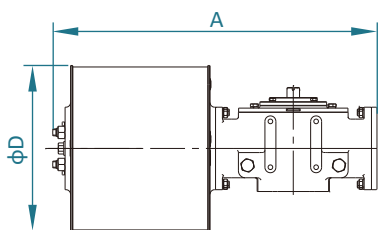


Fig.545 Air/air (Double acting)




Fig.545 Air/spring (Spring return)

Sizing - Fig.545 Air/air (Double acting)

Fig.223/224			Sizing - Fig.545 Double acting					
Size	ISO5211	1) Torque [Nm]	Model	Output torque [Nm] - Air supply 6bar		ISO5211	A [mm]	D [mm]
				Start/End	Run			
DN450	F14+F16	1200	545-1-200	2,132	1,125	F14	658	223
DN500	F14+F16	2200	545-1-250	3,403	1,796	F14	658	280
DN600	F16+F25	2800	545-2-250	4,197	2,216	F16	709	280
DN700	F25	3900	545-2-300	6,065	3,201	F16, F25	709	332
DN750	F25	5300	545-3-300	7,294	3,850	F25	828	332
DN800	F25	7300	545-3-350	8,746	4,616	F25	828	362
DN900	F25	8300	545-3-400	11,543	6,092	F25	828	413
DN1000	F30	12000	545-4-500	22,154	11,692	F30	982	514
DN1100	F30	16000	545-4-500	22,154	11,692	F30	982	514
DN1200	F30	21000	545-5-500	28,718	15,157	F35, F30	1217	514
DN1400	F35	25000	545-5-600	41,563	21,936	F35	1217	616
DN1600	F35	34000	545-5-600	41,563	21,936	F35	1217	616
DN1800	F40	38000	545-6-600	50,766	26,793	F40	1536	616
DN2000	F40	40000	545-6-600	50,766	26,793	F40	1536	616

Sizing - Fig.545 Air/spring (Spring return)

Fig.223/224			Sizing - Fig.545 Spring return									
Size	ISO5211	1) Torque [Nm]	Model	Air torque [Nm] - Air supply 6bar			Spring torque [Nm]			ISO5211	A [mm]	D [mm]
				0	45°	90°	0	45°	90°			
DN300	F10+F12	340	545-1-200-SR4	1441	732	1333	718	353	619	F14, F12	1370	220
DN350	F12+F14	600	545-1-200-SR3	875	410	678	1313	645	1132	F14	1370	220
DN400	F12+F14	800	545-1-200-SR3	875	410	678	1313	645	1132	F14	1370	220
DN450	F14+F16	1200	545-1-250-SR1	1799.587	869.55913	1495.5844	1742.8787	846.54123	1465.067	F14	1370	220
DN500	F14+F16	2200	545-2-300-SR1	3025.1575	1355.2547	2110.5446	3613.7815	1686.7111	2777.966	F16	1440	274
DN600	F16+F25	2800	545-3-300-SR2	3273	1404	2047	4795	2235	3675	F25	1600	327
DN700	F25	3900	545-3-350-SR1	3529.8964	1443.588	1940.5422	6219.3871	2899.1755	4766.962	F25	1600	327
DN750	F25	5300	545-4-400-SR3	6780.7092	2789.7402	3790.9377	9335.6875	4206.1735	6603.4962	F30, F25	1932	408
DN800	F25	7300	545-4-500-SR1	12098.815	5404.452	8381.2131	12586.305	5746.2578	9188.9882	F30, F25	1932	408
DN900	F25	8300	545-5-500-SR4	16572.155	6887.247	9526.8867	17537.985	7557.1655	11099.694	F35, F25	2275	508
DN1000	F30	12000	545-5-600-SR2	24698.745	10008.986	13230.044	25891.558	10899.268	15410.93	F35, F30	2275	508
DN1100	F30	16000	545-6-600-SR4	27413	10639	12904	34600	14762	21341	F40, F30	2702	682
DN1200	F30	21000	545-6-700-SR2	40064.922	15448.107	18475.275	49839.678	21097.848	30110.063	F40, F30	2702	682
DN1400	F35	25000	545-6-700-SR2	40064.922	15448.107	18475.275	49839.678	21097.848	30110.063	F40, F35	2702	682
DN1600	F35	34000	545-7-700-SR3	42,117	17,523	24,286	57,016	25,792	40,721	F48, F35	3590	682
DN1800	F40	38000	545-7-900-SR2	91966.485	42979.264	70902.305	67108.527	30338.681	47859.108	F48, F40	3590	682
DN2000	F40	40000	545-7-900-SR1	82619.343	35831.548	53163.366	83319.189	36870.594	56400.958	F48, F40	3590	682

1) Please consider a safe factor of 1.2~1.3 on the given torque values for the sizing; torque values given are for EPDM-H seats. The sizing of actuator to valve dimension are calculated on standard working conditions for Fig.223/224 butterfly valves. The actuators can also be delivered to other kind of quarter turn valves.

Fig.555/556 electrical actuator sizing

Fig.555/556 electrical actuators



Fig.556 Electrical actuators



Fig.555 Electrical actuators


Sizing - Fig.555/556 electrical actuators

Fig.223/224				Sizing - Fig.555/556				
Size	ISO5211	Drive shaft	¹⁾ Torque [Nm]	Model	Output torque [Nm]	Drive shaft	ISO5211	Weight [kg]
DN25/32	F05	11×11	11	556-005	50	14×14	F05+F07	3.6
DN40	F05	11×11	11	556-005	50	14×14	F05+F07	3.6
DN50	F05	11×11	12	556-005	50	14×14	F05+F07	3.6
DN65	F05	11×11	18	556-005	50	14×14	F05+F07	3.6
DN80	F05	11×11	26	556-005	50	14×14	F05+F07	3.6
DN100	F05+F07	14×14	38	556-008	80	14×14	F05+F07	4.6
DN125	F07	14×14	57	556-010	100	14×14	F05+F07	13
DN150	F07	17×17	105	555-015	150	17×17	F07+F10	17.3
DN200	F10	22×22	200	555-030	300	17×17	F10+F12	22
DN250	F10	22×22	280	555-050	500	22×22	F10+F12	23
DN300	F10+F12	27×27	340	555-050	500	27×27	F10+F12	23
DN350	F12+F14	27×27	600	555-080	800	27×27	F12+F14	29
DN400	F12+F14	27×27	800	555-120	1200	27×27	F12+F14	29
DN450	F14+F16	36×36	1200	555-200	2000	36×36	F14+F16	83
DN500	F14+F16	46×46	2200	555-300	3000	46×46	F14+F16	83
DN600	F16+F25	46×46	2800	555-400	4000	46×46	F16+F25	83


1) Please consider a safe factor of 1.2~1.3 on the given torque values for the sizing; torque values given are for EPDM-H seats. The sizing of actuator to valve dimension are calculated on standard working conditions for Fig.223/224 butterfly valves. The actuators can also be delivered to other kind of quarter turn valves.

Bolt quantity and length for valve installation


223 DN40-DN2000




224 DN40-DN600



224 DN700-DN2000 Type 1 Connection




224 DN700-DN2000 Type 2 Connection



DN	Flange	Wafer type connection			Lug type connection			
		Bolt Dia.	Qty of bolts	L	L1	Qty of bolts	L2	L3
40	PN10	M16	4	135	115	4x2	35	
	ANSI150	1/2" - 10 UNC	4	120	100	4x2	35	
50	PN10	M16	4	145	125	4x2	40	
	ANSI150	5/8" - 11 UNC	4	130	110	4x2	40	
65	PN10	M16	4	150	130	4x2	40	
	ANSI150	5/8" - 11 UNC	4	140	120	4x2	45	
80	PN10	M16	8	150	130	8x2	40	
	ANSI150	5/8" - 11 UNC	4	145	125	4x2	45	
100	PN10	M16	8	160	140	8x2	45	
	ANSI150	5/8" - 11 UNC	8	150	130	8x2	45	
125	PN10	M16	8	165	145	8x2	50	
	ANSI150	3/4" - 10 UNC	8	155	130	8x2	50	
150	PN10	M20	8	175	150	8x2	50	
	ANSI150	3/4" - 10 UNC	8	160	135	8x2	50	
200	PN10	M20	8	180	155	8x2	55	
	PN16	M20	12	185	160	12x2	55	
250	ANSI150	3/4" - 10 UNC	8	170	145	8x2	55	
	PN10	M20	12	200	175	12x2	60	
300	PN16	M24	12	210	185	12x2	60	
	ANSI150	7/8" - 9 UNC	12	190	165	12x2	60	
350	PN10	M20	12	210	185	12x2	65	
	PN16	M24	12	230	200	12x2	65	
400	ANSI150	7/8" - 9 UNC	12	200	175	12x2	60	
	PN10	M20	16	215	190	16x2	65	
450	PN16	M24	16	240	210	16x2	65	
	ANSI150	1" - 8 UNC	12	220	190	12x2	65	
500	PN10	M24	16	255	230	16x2	75	
	PN16	M27	16	280	250	16x2	75	
600	ANSI150	1" - 8 UNC	16	245	215	16x2	80	
	PN10	M24	20	275	245	20x2	80	
700	PN16	M27	20	310	280	20x2	80	
	ANSI150	1 1/8"-7UNC	16	265	235	16x2	80	
800	PN10	M24	20	295	260	20x2	85	
	PN16	M30	20	335	300	20x2	90	
900	ANSI150	1 1/8"-7UNC	20	285	250	20x2	90	
	PN10	M27	20	310	280	20x2	100	
1000	PN16	M33	20	385	350	20x2	100	
	ANSI150	1 1/4"-7UNC	20	335	300	20x2	110	
1200	PN10	M27	24	335	300	24x2	100	130
	PN16	M33	24	370	330	24x2	115	150
1400	ANSI150	1 1/4"-7UNC	28	385	345	28x2	120	160
	PN10	M30	24	375	340	24x2	115	150
1600	PN16	M36	24	425	380	24x2	130	175
	ANSI150	1 1/2"-6UNC	28	440	395	28x2	135	185
1800	PN10	M30	28	400	365	28x2	115	155
	PN16	M36	28	455	410	28x2	135	185
2000	ANSI150	1 1/2"-6UNC	32	475	430	32x2	145	195
	PN10	M33	28	435	395	28x2	125	165
2200	PN16	M39	28	485	440	28x2	145	190
	ANSI150	1 1/2"-6 UNC	36	485	440	36x2	145	190
2400	PN10	M36	32	505	365	32x2	145	195
	PN16	M45	32	505	460	32x2	145	195
2600	ANSI150	1 1/2" -6UNC	44	560	515	44x2	170	220
	PN10	M39	36	500	455	36x2	120	175
2800	PN16	M45	36	545	495	36x2	140	195
	ANSI150	1 3/4" -5UNC	48	620	575	48x2	180	235
3000	PN10	M45	40	565	515	40x2	135	190
	PN16	M52	40	630	575	40x2	160	220
3200	ANSI150	1 3/4" -5UNC	52	565	515	52x2	135	190
	PN10	M45	44	620	575	44x2	150	205
3400	PN16	M52	44	685	630	44x2	175	230
	ANSI150	1 3/4" -5UNC	60	620	575	60x2	150	205
3600	PN10	M45	48	680	635	48x2	160	215
	PN16	M56	48	770	710	48x2	190	250
3800	ANSI150	2" - 4.5UNC	64	680	635	64x2	160	215

Mating flange dimensions

- ISO 7005/1/2/3 PN6,10,16,20 Metallic Flanges
- DIN2501 PN6,10,16 Flanges, Mating Dimensions
- BS4504 PN6,10,16 Flanges and Bolting, Metric Series
- ANSI B16.5 CLASS150 Pipe Flanges and Flanged Fittings
- MSSSP44 Class150 Steel Pipeline Flanges
- BS10 Flanges and Bolting for Pipes, Valves and Fittings
- API605 CLASS150 Large Diameter Carbon Steel Flanges
- JISB2211 JIS 5K Basic Dimensions of 5bar Ferrous Materials Pipe Flanges
- JISB2212 JIS 10K Basic dimensions of 10bar Ferrous Materials Pipe Flanges
- JISB2213 JIS 16K Basic dimensions of 16bar Ferrous Materials Pipe Flanges

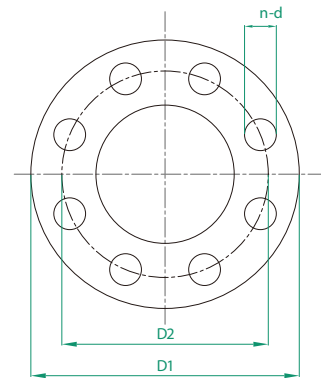


Size		PN6 (cast iron)					PN 10 (cas tiron)					PN 16 (cas tiron)					PN20					ANSI Class150					MSS/BS. Class150				
DN	NPS	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n		
40	1 1/2"	130	110	14	M12 4	150	110	18	M16 4	150	110	18	M16 4	130	98.5	16	M14 4	127	98.5	15.9	1/2 4										
50	2"	140	110	14	M12 4	165	125	19	M16 4	165	125	19	M16 4	150	120.5	18	M16 4	152	120.6	19.1	5/8 4										
65	2.5"	160	130	14	M12 4	185	145	19	M16 4	185	145	19	M16 4	180	139.5	18	M16 4	178	139.7	19.1	5/8 4										
80	3"	190	150	19	M16 4	200	160	19	M16 8	200	160	19	M16 8	190	152.5	18	M16 4	191	152.4	19.1	5/8 4										
100	4"	210	170	19	M16 4	220	180	19	M16 8	220	180	19	M16 8	230	190.5	18	M16 8	229	190.5	19.1	5/8 8										
125	5"	240	200	19	M16 8	250	210	19	M16 8	250	210	19	M16 8	255	216.0	22	M20 8	254	215.9	22.4	3/4 8										
150	6"	265	225	19	M16 8	285	240	23	M20 8	285	240	23	M20 8	280	241.5	22	M20 8	279	241.3	22.4	3/4 8										
200	8"	320	280	19	M16 8	340	295	23	M20 8	340	295	23	M20 12	345	298.5	22	M20 8	343	298.5	22.4	3/4 8										
250	10"	375	335	19	M16 12	395	350	23	M20 12	400	355	28	M24 12	405	362.0	26	M24 12	406	362.0	25.4	7/8 12										
300	12"	440	395	23	M20 12	445	400	23	M20 12	455	410	28	M24 12	485	432.0	26	M24 12	483	431.8	25.4	7/8 12	483	432	25	7/8 12						
350	14"	490	445	23	M20 12	505	460	23	M20 16	520	470	28	M24 16	535	476.0	29.5	M27 12	533	476.3	28.5	1 12	535	476	29	1 12						
400	16"	540	495	23	M20 16	565	515	28	M24 16	580	525	31	M27 16	600	540.0	29.5	M27 16	597	539.8	28.5	1 16	595	540	29	1 16						
450	18"	595	550	23	M20 16	615	565	28	M24 20	640	585	31	M27 20	635	578.0	32.5	M30 16	635	577.9	31.8	1 1/8 16	635	578	32	1 1/8 16						
500	20"	645	600	23	M20 20	670	620	28	M24 20	715	650	34	M30 20	700	635.0	32.5	M30 20	699	635.0	31.8	1 1/8 20	700	635	32	1 1/8 20						
600	24"	755	705	26	M24 20	780	725	31	M27 20	840	770	37	M33 20	815	749.5	32.5	M33 20	813	749.3	31.1	1/4 20	815	749	35	1 1/4 20						
700	28"	860	810	26	M24 24	895	840	31	M27 24	910	840	37	M33 24																		
750	30"	920	865	31	M27 24	965	900	34	M30 24	970	900	37	M33 24																		
800	32"	975	920	31	M27 24	1015	950	34	M30 24	1025	950	40	M36 24																		
900	36"	1075	1020	31	M27 24	1115	1050	34	M30 28	1125	1050	40	M36 28																		
1000	40"	1175	1120	31	M27 28	1230	1160	37	M33 28	1255	1170	43	M39 28																		
1100	44"	1305	1240	34	M30 32	1340	1270	37	M33 32	1355	1270	43	M39 32																		
1200	48"	1405	1340	34	M30 32	1455	1380	40	M36 32	1485	1390	49	M45 32																		

It should be noted that the diameters of the bolt holes in steel and copper alloy flanges are different from cast iron flanges.

Size		BS TABLE D					BS TABLE E					JIS 5K					JIS 10K					JIS 16K							
DN	NPS	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n	D1	D2	d	Bolt n
40	1 1/2"	133.4	98.4	15.9	1/2 4	133.4	98.4	15.9	1/2 4	120	95	15	M12 4	140	105	19	M16 4	140	105	19	M16 4	140	105	19	M16 4	140	105	19	M16 4
50	2"	152.4	114.3	19.1	5/8 4	152.4	114.3	19.1	5/8 4	130	105	15	M12 4	155	120	19	M16 4	155	120	19	M16 4	155	120	19	M16 4	155	120	19	M16 4
65	2.5"	165.1	127.0	19.1	5/8 4	165.1	127.0	19.1	5/8 4	155	130	15	M12 4	175	140	19	M16 4	175	140	19	M16 4	175	140	19	M16 4	175	140	19	M16 4
80	3"	184.2	146.1	19.1	5/8 4	184.2	146.1	19.1	5/8 4	180	145	19	M16 4	185	150	19	M16 8	200	160	23	M20 8	200	160	23	M20 8	200	160	23	M20 8
100	4"	215.9	177.8	19.1	5/8 4	215.9	177.8	19.1	5/8 8	200	165	19	M16 8	210	175	19	M16 8	225	185	23	M20 8	225	185	23	M20 8	225	185	23	M20 8
125	5"	254.0	209.6	19.1	5/8 8	254.0	209.6	19.1	5/8 8	235	200	19	M16 8	250	210	23	M20 8	270	225	25	M22 8	270	225	25	M22 8	270	225	25	M22 8
150	6"	279.4	235.0	19.1	5/8 8	279.4	235.0	22.2	3/4 8	265	230	19	M16 8	280	240	23	M20 8	305	260	25	M22 12	305	260	25	M22 12	305	260	25	M22 12
200	8"	336.6	292.1	19.1	5/8 8	336.6	292.1	22.2	3/4 8	320	280	23	M20 8	330	290	23	M20 12	350	305	25	M22 12	350	305	25	M22 12	350	305	25	M22 12
250	10"	406.4	355.6	22.2	3/4 8	406.4	355.6	22.2	3/4 12	385	345	23	M20 12	400	355	25	M22 12	430	380	27	M24 12	430	380	27	M24 12	430	380	27	M24 12
300	12"	457.2	406.4	22.2	3/4 12	457.2	406.4	25.4	7/8 12	430	390	23	M20 12	445	400	25	M22 16	480	430	27	M24 16	480	430	27	M24 16	480	430	27	M24 16
350	14"	527.1	469.9	25.4	7/8 12	527.1	469.9	25.4	7/8 12	480	435	25	M22 12	490	445	25	M22 16	540	480	33	M30 16	540	480	33	M30 16	540	480	33	M30 16
400	16"	577.9	520.7	25.4	7/8 12	577.9	520.7	25.4	7/8 12	540	495	25	M22 16	560	510	27	M24 16	605	540	33	M30 16	605	540	33	M30 16	605	540	33	M30 16
450	18"	641.4	584.2	25.4	7/8 12	641.4	584.2	25.4	7/8 16	605	555	25	M22 16	620	565	27	M24 20	675	605	33	M30 20	675	605	33	M30 20	675	605	33	M30 20
500	20"	704.9	641.4	25.4	7/8 16	704.9	641.4	25.4	7/8 16	655	605	25	M22 20	675	620	27	M24 20	730	660	33	M30 20	730	660	33	M30 20	730	660	33	M30 20
600	24"	825.5	755.7	28.5	1 16	825.5	755.7	31.7	1 1/8 16	770	715	27	M24 20	795	730	33	M30 24	845	770	39	M36 24	845	770	39	M36 24	845	770	39	M36 24
700	28"									875	820	27	M24 24	905	840	33	M30 24	960	875	42	M39 24	960	875	42	M39 24	960	875	42	M39 24
750	30"	997.0	927.1	31.7	1 1/8 20	997.0	927.1	34.9	1 1/4 20	945	880	33	M30 24	970	900	33	M30 24	1020	935	42	M39 24	1020	935	42	M39 24	1020	935	42	M39 24
800	32"									995	930	33	M30 24	1020	950	33	M30 28	1085	990	48	M45 24	1085	990	48	M45 24	1085	990	48	M45 24
900	36"	1174.8	1092.2	34.9	1 1/4 24	1174.8	1092.2	34.9	1 1/4 24	1095	1030	33	M30 24	1120	1050	33	M30 28	1185	1090	48	M45 28	1185	1090	48	M45 28	1185	1090	48	M45 28
1000	40"									1195	1130	33	M30 28	1235	1160	39	M36 28	1320	1210	56	M52 28	1320	1210	56	M52 28	1320	1210	56	M52 28
1100	44"									1305	1240	33	M30 28	1345	1270	39	M36 28	1420	1310	56	M52 32	1420	1310	56	M52 32	1420	1310	56	M52 32
1200	48"	1492.3	1409.7	34.9	1 1/4 32	1492.3	1409.7	38.1	1 3/8 32	1420	1350	33	M30 32	1465	1380	39	M36 32	1530	1420	56	M52 32	1530	1420	56	M52 32	1530	1420	56	M52 32

Installation Guide

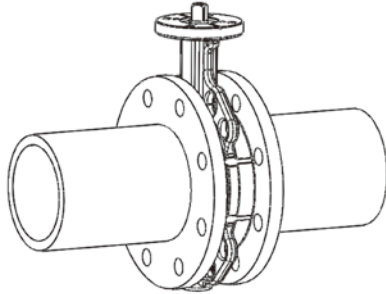





- Check that the specifications on the identification plate meet the requirements regarding pressure, temperature and media.
- The piping must have a straight line and the flanges have to be parallel. Furthermore there must be a distance between the flanges, corresponding to the face-to-face dimensions of the butterfly valve.
- The butterfly valve can be mounted in any direction. However if there are a lot of dirt particles on the bottom of the pipe, it will be suitable to mount the disc.
- Before commissioning, the pipework has to be rinsed out to remove dirt and remnants of welding material, to avoid damage on the liner. During the rinsing procedure, the butterfly valve has to be positioned as open and may not be operated before the rinsing has been completed.
- Welding operations may not be performed nearby the butterfly valve, as welding drops can damage the liner.
- Do not use gaskets. The liner works as sealing to the atmosphere.
- Where vacuum, high flow rate or water hammering can occur, flanges without a loose collar should be used, to obtain the best conditions.

Carefully place the butterfly valve between the flanges, with the disc in closed position.

Check that the flange covers the area of the liner. Afterwards tighten the bolt on the flange by hand.

Carefully open and close the valve to check that the disc centralizes and the disc does not touch the flange. With the disc in the open position, tighten crosswise with a wrench.


Ensure that 2240 lug butterfly valve is installed in proper flow direction for end of pipe service: the flow arrow direction on valve nameplate or body should be in accordance with the flow direction of medium.

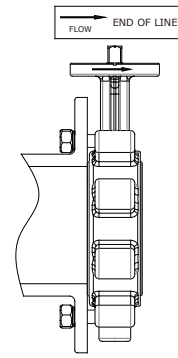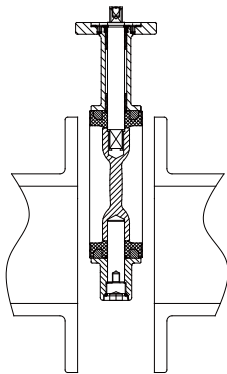

As the butterfly valves are equipped with the unique wave shaped liner, the operation of the valves, either free stem, handle or gear operated, has to follow the guidelines as shown below.



A small triangular shaped figure is placed on the liner, this triangle indicates which way the disc opening. Turn disc Anticlockwise towards arrow to open

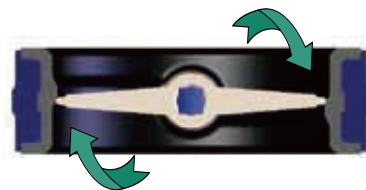

Turn Clockwise to close the valve, the valve sealing in the area of -2° to 2° range. If lower torque necessary, stop the disc to the 2° to 0° range; If tighter sealing necessary, stop the disc to the 0° to -2° range.

The content or parameters are indicative and can be changed without any notice.

Coreline

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

CORELINE VALVE CO., LTD.

Add: No.210 Xinyuan Road, Ehu Industrial Park, 214116 Wuxi, China

Phone: +86 510 8852 5336

Http: // www.coreline.dk

E-mail : mail@coreline.cn