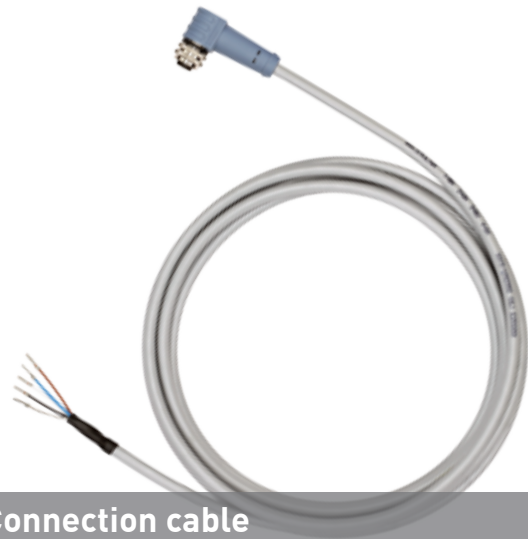





## Accessories



Cable socket with two LEDs



Connection cable

| Order code  |  |                    |                               |
|---|--|--------------------|-------------------------------|
| Accessories   |  | Length             | Order number                  |
|  | Connection cable with 4-pin cable socket M12 x 1, sheathing material PUR, shielded, ( $T_{max} = 80\text{ °C}$ ) - UL-approval   | 3 m<br>5 m<br>10 m | XVT2053<br>XVT2009<br>XVT2070 |
|  | 4-pin cable socket M12 x 1 angle type, unassembled   |                    | VT1331                        |
|  | Cable socket with two LEDs<br>Switching voltage 24...230 V AC/DC $\pm 20\%$<br>Ambient temperature -20...70 °C<br>for retrofit / replacement of cable socket without LED |                    | XVH958                        |

